

## OSAKA




LIVID OK02



COFFEE CREAM WT09


RECOMMENDED INSTALLATION METHODS:



QUARTER-TURN



039-025-2280  
Environmentally Preferred Carpet.



GREY OK05




BROWN OK01

STYLE NAME:  
CONSTRUCTION:  
YARN:  
DYED METHOD:  
GAUGE:  
PILE HEIGHT:  
TOTAL THICKNESS:  
PILE WEIGHT:  
TOTAL WEIGHT:  
TILE BACKING:  
TILE SIZE:  
PACKING:

**PERFORMANCE**

ELECTROSTATIC PROPENSITY:  
FLAMMABILITY:  
RADIANT PANEL:  
COLORFASTNESS TO LIGHT:  
COLORFASTNESS TO CROCKING:  
ACCELERATED SOILING:  
SINGAPORE GREEN LABEL:  
TUFT BIND:  
AACHEN DIMENSIONAL STABILITY:  
ROLL CHAIR TESTING:

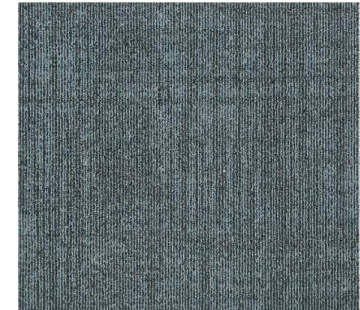

LIVID OK02



BLACK OK06

**Osaka**

Multi-level Loop piles  
100% Nylon  
100% Solution Dyed  
1/12"  
3.2 ± 0.2 mm  
6.5 ± 0.2mm  
20 oz/yd<sup>2</sup>  
4300g/m<sup>2</sup>±-200g/m<sup>2</sup>  
PVC with Glass Fiber  
50cm x 50cm  
20 PCS


< 2.0 kv at 20% R.H. 70 deg F (AATCC 134 1996)  
ASTM D 2859 Pill Test  
ASTME 648 (Class 1)  
≥ 5 (AATCC 16E)  
≥ 5 (AATCC 165)  
5 (ASTM D 6540)  
039-025-2280  
12.8 lbs (ASTM D 1335)  
ITTS 004  
ITTS 004

\* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELLOT VARIATIONS.

## OXFORD



**GREEN GRASS OX09**




**SOMBER YELLOW OX78**



**BRICK ORANGE OX79**




**VALIANT RED OX11**




**FRIENDLY BROWN OX17**



**RESPECT GREY OX15**



**NAVY BLUE OX13**




**UNITY ASH OX19**

**STYLE NAME:** Oxford  
**CONSTRUCTION:** Level Loop  
**FACE YARN:** 100% Universal Nylon  
**DYED METHOD:** Solution Dyed  
**GAUGE:** 1/10"  
**PILE HEIGHT:** 3.5mm +/- 5%  
**TOTAL THICKNESS:** 6.5mm +/- 5%  
**PILE WEIGHT:** 580g/m<sup>2</sup>  
**TOTAL WEIGHT:** 4800g/m<sup>2</sup>  
**TILE BACKING:** PVC with Glass Fiber  
**PRIMARY BACKING CLOTH:** Non-woven Polyester Spunbonded  
**YARN TREATMENTS:** 3M Scotchgard Permanently Anti Static  
**ANTI-SOIL, ANTI-OIL TREATMENT:** 3M Scotchgard  
**TILE SIZE:** 50cm x 50cm  
**PACKING:** 20 PCS



**RECOMMENDED INSTALLATION METHODS:**



QUARTER-TURN



039-025-2280

Environmentally Preferred Carpet .


\* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELOT VARIATIONS.

**PARIS ELEGANT**



**DOWN TO EARTH 6H & LAND STONE 6E**

RECOMMENDED INSTALLATION METHODS:



QUARTER-TURN




039-025-2280

Environmentally Preferred Carpet .



**DOWN TO EARTH 6H**

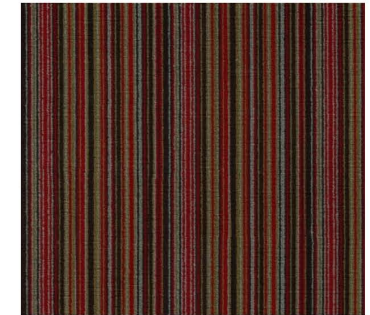

**LUCKY CHARM 6G**



**LAND STONE 6E**



**DASHED OFF 6A**

STYLE NAME:	<b>Paris Elegant</b>
CONSTRUCTION:	Tufted Texture Loop
FACE YARN:	100% Synthetic BCF
DYED METHOD:	Solution Dyed
GAUGE:	1/10"
PILE HEIGHT:	4.0mm +/- 5%
TOTAL THICKNESS:	7.0mm +/- 5%
PILE WEIGHT:	650G/M <sup>2</sup>
TILE BACKING:	PVC
TILE SIZE:	50cm x 50cm
PACKING:	20 PCS

**PERFORMANCE**

ELECTROSTATIC PROPENSITY:	AATCC 134 1996
FLAMMABILITY:	ASTM D 2859 96 Pill Test
COLORFASTNESS TO LIGHT:	AATCC 16
TUFT BIND:	ASTM D 1335
AACHEN DIMENSIONAL STABILITY:	ITTS 004
ACCELERATED SOILING:	ASTM D 6540

\* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELOT VARIATIONS.

## STARONE



NIGHT BLUE ST05




GOLD BROWN ST03

RECOMMENDED INSTALLATION METHODS:




QUARTER-TURN



STEEL GREY ST02



GOLD BROWN ST03



NIGHT BLUE ST05

**STYLE NAME:**  
**CONSTRUCTION:**  
**YARN:**  
**COMPONENT:**  
**GAUGE PER INCH:**  
**PILE HEIGHT:**  
**TOTAL THICKNESS:**  
**PILE WEIGHT:**  
**TOTAL WEIGHT:**  
**TILE BACKING:**  
**TILE SIZE:**  
**PACKING:**

**Starone**  
 Multi Level loop  
 Solution Dyed BCF  
 100% BCF Synthetic Fiber  
 1/12"  
 4.0+/- 0.5mm  
 6.0mm +/- 0.5mm  
 16 oz/yd<sup>2</sup>  
 4300g/m<sup>2</sup>+/-100g/m<sup>2</sup>  
 PVC  
 50cm x 50cm  
 20 PCS

### PERFORMANCE

**ELECTROSTATIC PROPENSITY:**

Less than 2.0 kv at 20% R.H.  
 70 deg F (AATCC 134 1996)  
 8 passed 8 (ASTM D 2859 96 Pill Test)  
 ASTM E 648-04

**FLAMMABILITY:**

**RADIANT PANEL TEST:**

**COLORFASTNESS TO LIGHT:**

**COLORFASTNESS TO CROCKING:**

**ACCELERATED SOILING:**

**TUFT BIND:**

**AACHEN DIMENSIONAL STABILITY:**

**ROLL CHAIR TESTING:**

≥ 5 (AATCC 165)  
 ≥ 5 (AATCC 16E)  
 5 (ASTM D 6540)  
 8.8 lbs (ASTM D 1335)  
 ITTS 004  
 ITTS 205



\* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELOT VARIATIONS.

## TOKYO



**SILVER TULIP TK01**



**BROWN CHERRY TK03**



**BROWN CHERRY TK03**



**SILVER TULIP TK01**



**BLACK LILY TK04**

STYLE NAME:  
CONSTRUCTION:  
YARN:  
DYED METHOD:  
GAUGE:  
PILE HEIGHT:  
TOTAL THICKNESS:  
PILE WEIGHT:  
TOTAL WEIGHT:  
TILE BACKING:  
PRIMARY BACKING CLOTH:  
YARN TREATMENTS:  
ANTI-SOIL, ANTI-OIL TREATMENT:  
TILE SIZE:  
PACKING:  
**PERFORMANCE**  
ELECTROSTATIC PROPENSITY:


FLAMMABILITY:  
RADIANT PANEL:  
COLORFASTNESS TO LIGHT:  
COLORFASTNESS TO CROCKING :  
ACCELERATED SOILING:  
SINGAPORE GREEN LABEL:  
SINGAPORE GREEN BUILDING COUNCIL:  
CRI GREEN LABEL PLUS:  
TUFT BIND:  
AACHEN DIMENSIONAL STABILITY:  
ROLL CHAIR TESTING:

**Tokyo**  
Multi-level Loop piles  
100% Universal Nylon  
100% Solution Dyed  
1/10"  
4 ± 0.3 mm  
7 ± 0.3mm  
17 oz/yd2  
4500g/m2+/-200g/m2  
PVC with Glass Fiber  
Non-woven Polyester Spunbonded  
3M Scotchgard Permanently Anti Static  
3M Scotchgard  
50cm x 50cm  
20 PCS


Less than 2.0 kv at 20% R.H.  
70 deg F (AATCC 134 1996)  
ASTM D 2859 Pill Test  
ASTME 648 (Class 1)  
≥ 5 (AATCC 16E)  
≥ 5 (AATCC 16S)  
5 (ASTM D 6540)  
039-025-2280  
039-004-1901  
GLP1879  
12.8 lbs (ASTM D 1335)  
ITTS 004  
ITTS 004



### RECOMMENDED INSTALLATION METHODS:



QUARTER-TURN



MONOLITHIC

\* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELOT VARIATIONS.


## TRAPE CITY "Customize Your Own Pattern"



TC01 + TC02 + TC03 + TC07



TC04 + TC05 + TC06 + TC08

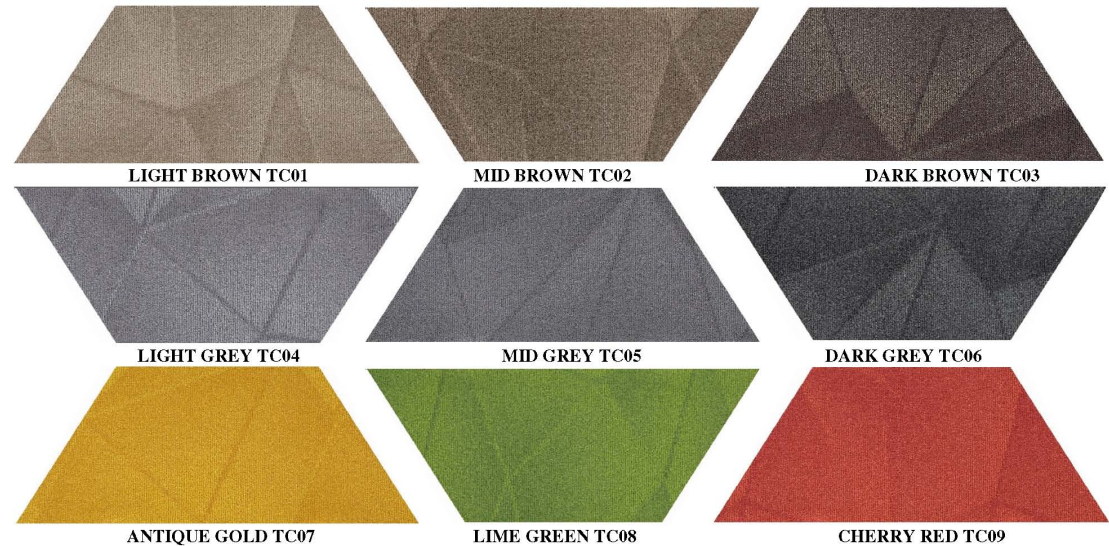


### SPECIFICATIONS

STYLE NAME:	<b>Trape City</b>
CONSTRUCTION:	Multi-Level loop piles
YARN:	100% Universal Nylon
DYED METHOD:	100% Solution Dyed
GAUGE:	5/64
PILE HEIGHT:	2.5- 5.5mm (± 0.5 mm)
TOTAL THICKNESS:	6 ± 0.5mm
PILE WEIGHT:	19 oz/yd <sup>2</sup>
TILE BACKING:	PVC with Glass Fiber
PACKING:	12 PCS, 0.175sm / PC


### PERFORMANCE

ELECTROSTATIC PROPENSITY:	Less than 2.0 kv at 20% R.H. 70 deg F (AATCC 134 1996)
FLAMMABILITY:	ASTM D 2859 Pill Test
RADIANT PANEL:	ASTME 648 (Class 1)
COLORFASTNESS TO LIGHT:	≥ 5 (AATCC 16E)
COLORFASTNESS TO CROCKING:	≥ 5 (AATCC 165)
ACCELERATED SOILING:	5 (ASTM D 6540)
CRI GREEN LABEL PLUS:	GLP1721
TUFT BIND:	12.8 lbs (ASTM D 1335)
AACHEN DIMENSIONAL STABIL ITTS	004



Isosceles Trapezium  
 a:36.6cm b:73.2cm h:31.7cm  
 1PC=0.175sqm

### INSTALLATION METHODS



\* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELLOT VARIATIONS.

VENICE




CLASSIC BROWN VN05




SILENT GREY VN03


RECOMMENDED INSTALLATION METHODS:



QUARTER-TURN



ASHLAR



BRICK



039-025-2280  
Environmentally Preferred Carpet.



BRIGHT IDEA VN01



CLASSIC BROWN VN05

STYLE NAME:  
CONSTRUCTION:  
YARN:  
DYED METHOD:  
GAUGE:  
PILE HEIGHT:  
TOTAL THICKNESS:  
PILE WEIGHT:  
TOTAL WEIGHT:  
TILE SIZE:  
PACKING:



REFRESH BLUE VN06



SILENT GREY VN03

**Venice**  
Multi-level Loop piles  
Nylon  
100% Solution Dyed  
1/12"  
3.5 mm +/- 5%  
6 mm +/- 5%  
550 g/m<sup>2</sup>  
4500 g/m<sup>2</sup>  
50cm x 50cm  
20 PCS

**PERFORMANCE**

ELECTROSTATIC PROPENSITY: AATCC 134 1996  
FLAMMABILITY: ASTM D 2859 Pill Test  
RADIANT PANEL: ASTM E 648  
COLORFASTNESS TO LIGHT: AATCC 16E  
COLORFASTNESS TO CROCKING: AATCC 165  
SINGAPORE GREEN LABEL: 039-025-2280  
TUFT BIND: ASTM D 1335  
AACHEN DIMENSIONAL STABILITY: ITTS 004  
ACCELERATED SOILING: ASTM D 6540

\* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELLOT VARIATIONS.




MILK TEA WT01




COFFEE CREAM WT09


RECOMMENDED INSTALLATION METHODS:



QUARTER-TURN




ASHLAR



BRICK



MILK TEA WT01



OLIVE BLEND WT02

STYLE NAME:  
CONSTRUCTION:  
FACE YARN:  
COLOUR SYSTEM:  
GAUGE:  
PILE HEIGHT:  
TOTAL THICKNESS:  
PILE WEIGHT:  
TOTAL WEIGHT:  
TILE BACKING:  
TILE SIZE:  
PACKING:

**PERFORMANCE**

ELECTROSTATIC PROPENSITY:  
LIGHT COLORFASTNESS:  
CROCKING COLORFASTNESS:  
FIRE RETARDANT:  
ENVIRONMENTAL:  
PROTECTION:

**World Trade**

Multi-level Loop piles


Nylon  
Solution Dyed

1/12"  
4mm +/- 5%  
6.5mm +/- 5%  
550 g/m<sup>2</sup>  
4600 g/m<sup>2</sup>  
PVC  
50cm x 50cm  
20 PCS

NO. WT-2005-0121 LEVEL U30≤0.1(GB/T 18044-2000)  
≥4.0 (GB/T 11746-89)  
≥4.0 (GB/T 11746-89)  
NO. 520051 (GB/T 14768-93)  
NO. WT-2005-011-AAA LEVEL  
(GB 18587-2001)



SPA POOL WT05

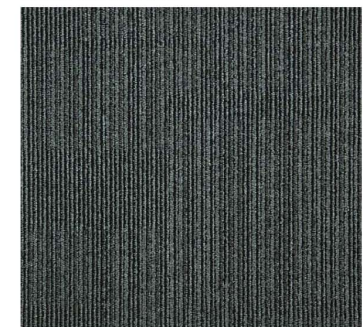

COFFEE CREAM WT09



039-025-2280

Environmentally Preferred Carpet.


\* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELOT VARIATIONS.





**BLACKMORE FA701**

RECOMMENDED INSTALLATION METHODS:



QUARTER-TURN



039-025-2280


Environmentally Preferred Carpet .

**ANB Furnishing Pte Ltd**


6 Clementi Loop, #02-21 (Office & Showroom), Singapore 129814  
 #02-13A (Warehouse) – (Access via loading lift at the back of the building)  
 Tel : 65-6569 3345 , Fax : 65-6569 4544




**MAPLE FA707**

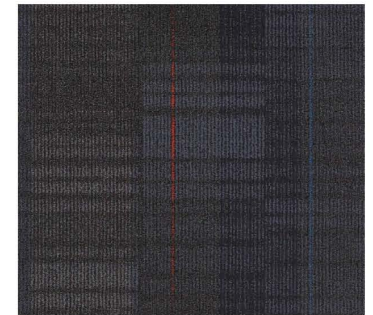

**SKYVIEW FA706**

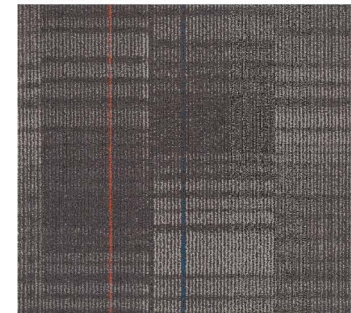

**THE BRONX FA703**

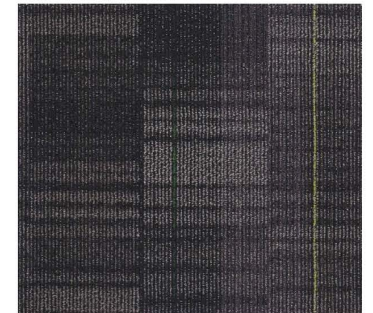

**BLACKMORE FA701**

STYLE NAME:	<b>5TH Avenue</b>
CONSTRUCTION:	Multi-Level Loop
FACE YARN:	90% PP + 10% Nylon
COLOUR SYSTEM:	Solution Dyed
GAUGE:	1/12"
PILE HEIGHT:	3.5mm +/- 5%
TOTAL THICKNESS:	6.5mm +/- 5%
PILE WEIGHT:	17 oz/yd <sup>2</sup>
TILE BACKING:	PVC
TILE SIZE:	60cm x 60cm
PACKING:	20 PCS

**PERFORMANCE**

ELECTROSTATIC PROPENSITY:	≤ 2.0 KV (AATCC 134-1996)
FLAMMABILITY:	ASTM D 2859 96 Pill Test
COLORFASTNESS TO LIGHT:	AATCC 16
TUFT BIND:	ASTM D 1335
AACHEN DIMENSIONAL STABILITY:	ITTS 004
ACCELERATED SOILING:	ASTM D 6540


\* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELOT VARIATIONS.

## ABBEY COLLECTION



**RED TB55**

RECOMMENDED INSTALLATION METHODS:




QUARTER-TURN




039-025-2280


Environmentally Preferred Carpet.




**LIGHT GREY TB01**



**GREY TB02**



**MILO TB51**




**BLACK TB03**



**BROWN TB27**



**BLUE TB35**



**RED TB55**

**STYLE NAME:** Abbey Collection  
**CONSTRUCTION:** Level Loop  
**FACE YARN:** 100% B.C.F Synthetic Fiber  
**GAUGE:** 1/10"  
**PILE HEIGHT:** 3.50 mm +/- 5%  
**TOTAL THICKNESS:** 6.5 mm +/- 5%  
**PILE WEIGHT:** 550 g/m<sup>2</sup>  
**TILE BACKING:** PVC with Glass Fiber  
**TILE SIZE:** 50cm x 50cm  
**PACKING:** 24 PCS

**PERFORMANCE**

**ELECTROSTATIC PROPENSITY:** Less than 2.0 kv at 20% R.H. 70 deg F (AATCC 134 1996)  
**FLAMMABILITY:** 8 passed 8 (ASTM D 2859 96 Pill Test)

\* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELOT VARIATIONS.

**RADIANT PANEL TEST:** ASTM E 648-04  
**COLORFASTNESS TO LIGHT:** ≥ 5 (AATCC 165)  
**COLORFASTNESS TO CROCKING:** ≥ 5 (AATCC 16E)  
**ACCELERATED SOILING:** 5 (ASTM D 6540)  
**TUFT BIND:** 8.8 lbs (ASTM D 1335)  
**AACHEN DIMENSIONAL STABILITY:** ITTS 004  
**ROLL CHAIR TESTING:** ITTS 205

## CHICAGO




**BROWN BEAR CG31**



**GREY TOWER CG34 & DARK NIGHT CG36**

RECOMMENDED INSTALLATION METHODS:



QUARTER-TURN



039-025-2280  
Environmentally Preferred Carpet.



**BROWN BEAR CG31**



**GREY TOWER CG34**



**DARK NIGHT CG36**

STYLE NAME:

CONSTRUCTION:

YARN:

COMPONENT:

GAUGE PER INCH:

PILE HEIGHT:

TOTAL THICKNESS:

PILE WEIGHT:

TOTAL WEIGHT:

TILE BACKING:

TILE SIZE:

PACKING:

**Chicago**

Multi-level Loop

Solution Dyed PP

100% BCF Synthetic Fiber

5/64

3.5 mm +/- 0.5mm

6.5 mm +/- 0.5mm

650 g/m<sup>2</sup>

4900g/m<sup>2</sup>

PVC with Glass Fiber

50cm x 50cm

20 PCS

### PERFORMANCE

ELECTROSTATIC PROPENSITY:

FLAMMABILITY:

TUFT BIND:

AACHEN DIMENSIONAL STABILITY:

ACCELERATED SOILING:

COLORFASTNESS TO LIGHT:

ROLL CHAIR TESTING:

AATCC 134 1996

ASTM D 2859 96 Pill Test

ASTM D 1335

ITTS 004

ASTM D 6540

AATCC 16

ITTS 205

\* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELOT VARIATIONS.




## COLORBEAT PLANK




**DARK CLOUD CP04**



**YELLOW SUBMARINE CP03**

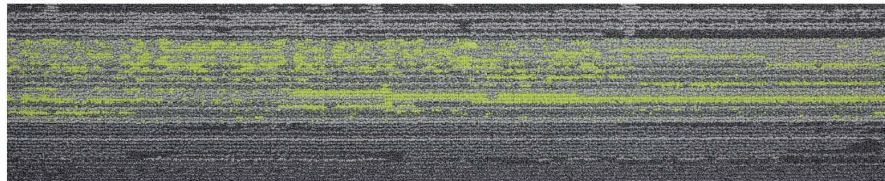

**GREEN GRASS CP05**

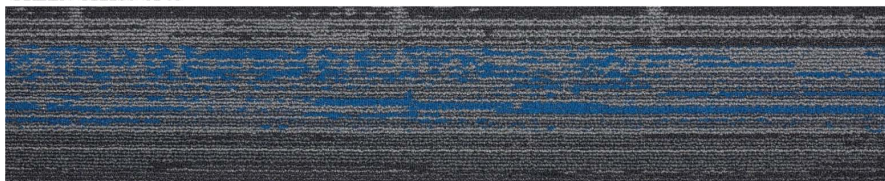


**JAZZ BLUE CP06**

\* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELOT VARIATIONS.

**ANB Furnishing Pte Ltd**

No. 51 , #01-12 , Bukit Batok Crescent Unity Centre , Singapore 658077


Tel : 65-6569 3345 , Fax : 65-6569 4544

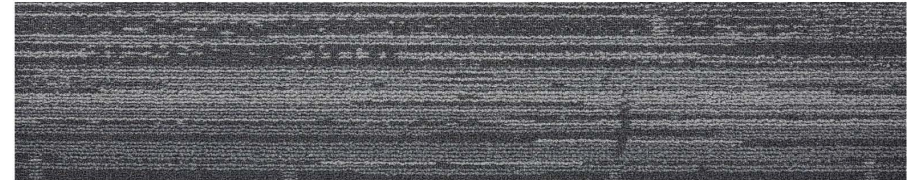

**SILVER NIGHT CP13**



**DARK CLOUD CP04**

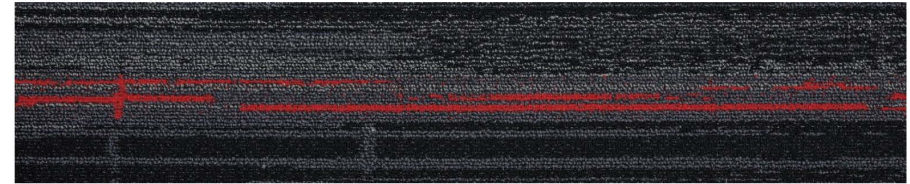

**SIMPLY RED CP08**

### SPECIFICATIONS

<b>STYLE NAME:</b>	Colorbeat Plank
<b>CONSTRUCTION:</b>	Multi-level Loop piles
<b>YARN:</b>	100% Nylon 6
<b>DYED METHOD:</b>	100% Solution Dyed
<b>GAUGE:</b>	1/12"
<b>PILE HEIGHT:</b>	3.5mm +/- 0.2mm
<b>TOTAL THICKNESS:</b>	6.5mm +/- 0.2mm
<b>PILE WEIGHT:</b>	650 g/m <sup>2</sup>
<b>TOTAL WEIGHT:</b>	4800 g/m <sup>2</sup>
<b>TILE BACKING:</b>	PVC with Glass Fiber
<b>PRIMARY BACKING CLOTH:</b>	Non-woven Polyester Spunbonded
<b>YARN TREATMENTS:</b>	3M Scotchgard Permanently Anti Static
<b>ANTI-SOIL, ANTI-OIL TREATMENT:</b>	3M Scotchgard
<b>TILE SIZE:</b>	25cm x 100cm
<b>PACKING:</b>	20 PCS
<b>PERFORMANCE</b>	
<b>ELECTROSTATIC PROPENSITY:</b>	AATCC 134 1996
<b>FLAMMABILITY:</b>	ASTM D 2859 Pill Test
<b>RADIANT PANEL:</b>	ASTME 648 (Class 1)
<b>COLORFASTNESS TO LIGHT:</b>	AATCC 16E
<b>COLORFASTNESS TO CROCKING :</b>	AATCC 165
<b>SINGAPORE GREEN LABEL:</b>	039-025-2280
<b>SINGAPORE GREEN BUILDING COUNCIL</b>	039-004-1901
<b>CRI GREEN PLUS LABEL:</b>	GLP1879
<b>TUFT BIND:</b>	ASTM D 1335
<b>AACHEN DIMENSIONAL STABILITY:</b>	ITTS 004
<b>ACCELERATED SOILING:</b>	ASTM D 6540



**ASHLAR**



**HERRINGBONE**



**PARQUET**



**MONOLITHIC**



**PANDOM**



**ANB Furnishing Pte Ltd**

6 Clementi Loop, #02-21 (Office & Showroom), Singapore 129814  
 #02-13A (Warehouse) – (Access via loading lift at the back of the building)  
 Tel : 65-6569 3345 , Fax : 65-6569 4544

**GRASS CARPET**



CONSTRUCTION: 3/8 Artificial Grass  
 FIBRE: 65% PE+ 35%PP  
 DENSITY: 16800 / m2  
 PILE WEIGHT: 650g/ m2  
 PILE HEIGHT: 20 mm  
 TOTAL WEIGHT: 1720g/ m2  
 STITCHES: 16 /10cm  
 SECONDARY BACKING: SBR  
 ROLL WIDTH: 2.00m  
 ROLL LENGTH: 25.00m

**LUXURY GRASS 02**



CONSTRUCTION: 3/8 Artificial Grass  
 FIBRE: 65% PE+ 35%PP  
 DENSITY: 18900 / m2  
 PILE WEIGHT: 950g/ m2  
 PILE HEIGHT: 30 mm  
 TOTAL WEIGHT: 2005g/ m2  
 STITCHES: 18/10cm  
 SECONDARY BACKING: SBR  
 ROLL WIDTH: 2.00m  
 ROLL LENGTH: 25.00m

**NATURAL GRASS 02**

**PERFORMANCE**

100% Solution Synthetic: Extremely Hardwearing, Waterproof and Abrasion Resistant Fibre  
 UV Stabilized : Chemically Treated to Provide Maximum Protection Against Fading from Ultra Violet Sunlight  
 Solution Dyed : For Excellent Colourfastness

**\* OUTSTANDING FEATURES OF TRENCO GRASS CARPET**

Wide Selection of Texture , Colors and Thickness  
 Strong and Hardwearing Surface  
 Superior Colorfastness-High Resistance to Fading  
 Water Proof and Rot Proof  
 Mildew Resistant

**\* WARRANTIES**

3-Year Limited Warranty

**\* SUITABILITY**

Around Swimming Pool, Exhibitions, Wall decoration, Displays, Home Lawns ,  
 Landscape Gardens - Indoor & Outdoor, Balconies , Verandas , Sailboat , Yachts  
 Children's Playground

